


# MVS60155LV

## Thermostatic Mixing Valve

**FLOMIX** Thermostatic Mixing Valve 15mm Complete in 5 Hole Stainless Steel Box Enclosure with Pressure Limiting Valve- Health Approved

### Technical Information:

Material	Brass / Stainless Steel
Cartridge	Mechanical / Wax Element
Inlet Valve	15mm
Outlet Valve	20mm
Working Pressures	20kpa - 500kpa
Mixed Temp.	Min 35°C - Max 50°
Inlet Temp. (Hot)	Min 55° - Max 80°
Inlet Temp. (Cold)	Min 5° - Max 30°
Max Inlet Pressure	10:1 Ratio
Colour	Chrome Plated Valve
Servicing	Regular Maintenance
Warranty	5 Years*

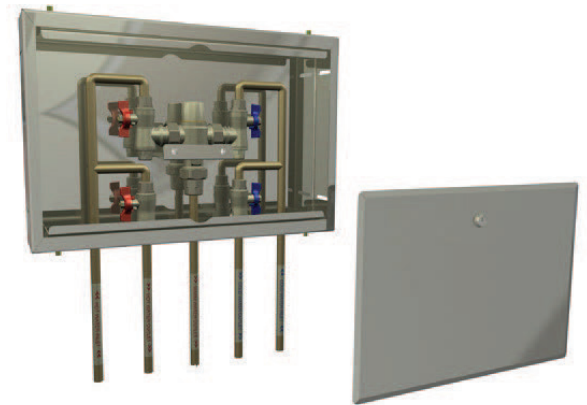

### Features:

- NSW Health approved
- PLV can be adjusted between 350kpa and 500kpa
- Can support up to 6 connections (depending on flow rate)
- High performing / high flow rates - 54lpm at 500kpa
- Easy, low cost maintenance requirements
- Removable strainers and isolation points in the hot and cold sections allow for easy maintenance
- Powder coating available for lids
- Recommended for any project

