

PRODUCT SPEC SHEET

SPK


BRASS DZR BALL VALVES

MATERIAL



- Body: DZR Brass Body, with Extra Long Threads
- Ball: Chrome Plated DZR Brass Ball
- Seal: Teflon Seal
- Long Handle: Stainless Steel with Plastic Cover
- T Handle: Cast Aluminum Alloy

PERFORMANCE

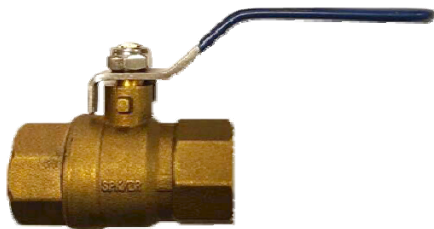

- Comply with ATS 5200.012 standards
- Working temperature range: 0°C to 120°C
- Max pressure as follows:

| Size | Bar | PSI |
|------|-----|-----|
| 15mm | 64 | 928 |
| 20mm | 40 | 580 |
| 25mm | 40 | 580 |
| 32mm | 25 | 362 |
| 40mm | 25 | 362 |
| 50mm | 25 | 362 |

PRODUCT RANGE

| Product Code | | | |
|--------------|---------|----------|--------|
| Long Handle | | T Handle | |
| BVLMF15 | BVLFF15 | BVTMF15 | BVTF15 |
| BVLMF20 | BVLFF20 | BVTMF20 | BVTF20 |
| BVLMF25 | BVLFF25 | BVTMF25 | BVTF25 |
| | BVLFF32 | | BVTF32 |
| | BVLFF40 | | BVTF40 |
| | BVLFF50 | | BVTF50 |

WARRANTY

5 Years Warranty

SPK

Auckland
Ph: +64 9 271 3720
Address: 49 Sir William Ave, East Tamaki

Christchurch
Ph: +64 3 341 1 271
Address: Unit 5, 4-6 O'Brien's Road, Sockburn

Email: sales@spk.co.nz
Website: <http://www.spk.co.nz>